



HK

HK005 X 9030 W

40W - 3880 lm - 90 CRI - 4000K


Design: QUATTROBI TECHNICAL DEPARTMENT

Adjustable projector with LED lighting system. Optical assembly is equipped with a front protection louver in polycarbonate. With electronic ballast.

Housing ordering info

Structural features

Installation	Track
Luminaire housing	steel sheet
Louver	polycarbonate
Finishing	black, grey, white
Light beam	W - Wide - 64°
Power supply	120V-60HZ
Adapter	XTS

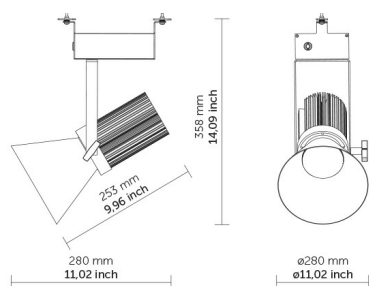

Features of light sources

Life	50.000 hours -L80 -B10 (Ta 25°C)
Luminaire efficiency	97 lm/W
Shielding angle	UGR < 22

