



## KOR

**KR107 X 9030 W**

**35W - 3384 lm - 90 CRI - 4000K**


Design: Quattrobi Technical Department

Adjustable projector with LED lighting system. Optical assembly is equipped with a front protection louver in tempered glass. With electronic ballast.

### Housing ordering info

### Structural features

<b>Installation</b>	Track
<b>Luminaire housing</b>	drawn aluminium
<b>Louver</b>	tempered glass
<b>Finishing</b>	black, grey, white
<b>Light beam</b>	W - Wide - 51°
<b>Accessories</b>	Adapter kit for ceiling installation
<b>Insulation class</b>	I
<b>Power supply</b>	120V-60HZ
<b>Adapter</b>	X

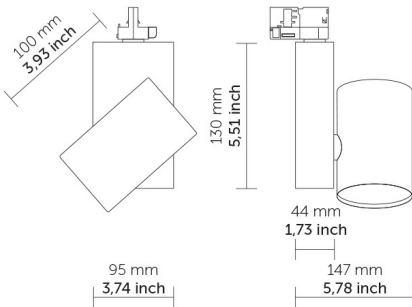

### Features of light sources

<b>Life</b>	50.000 hours -L80 -B10 ( Ta 25°C)
<b>Luminaire efficiency</b>	97 lm/W
<b>Shielding angle</b>	UGR < 22

### Accessories

GA070 Adapter kit for ceiling installation (available in black and white colors only)

