



KOR INCASSO

KR113 X 9030 W

35W - 3213 lm - CRI 90 - 3000K


Design: QUATTROBI TECHNICAL DEPARTMENT

Recessed projector with LED lighting system. Adjustable optical assembly is equipped with a front protection louver in tempered glass. With electronic ballast remote.



Housing ordering info

Structural features

Installation	Recessed
Luminaire housing	tempered glass
Louver	drawn aluminium
Finishing	black, grey, white
Light beam	W - Wide - 68°
Insulation class	I
Power supply	120V-60HZ

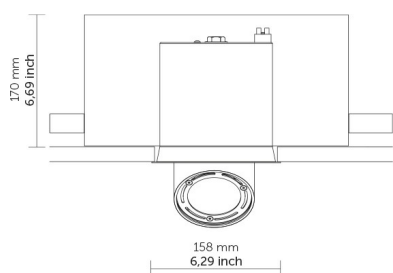

Ø155 mm
Ø6.10 inch

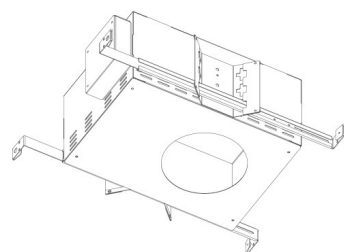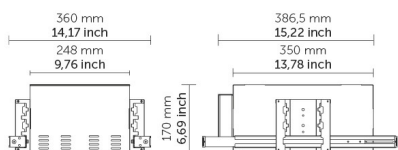

Features of light sources

Life	50,000 hrs with 70% of flux left
Luminaire efficiency	90 lm/W
Shielding angle	UGR < 22

